

Amcan

Architectural products at its best

Versatile Pre-painted Steel Roofing
and Wall Cladding Products



Amdex.

Polydeck.

PolyOrb.

Total Roofing & Cladding Solutions


Premium 55% Al-Zn Alloy Coated Steel

www.amcancolor.com





Fastening System To Suit The

Amdex.

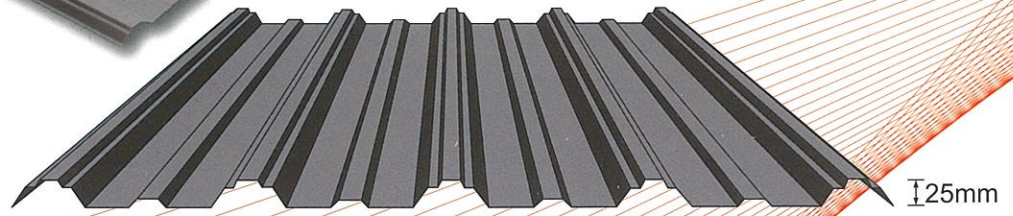

760mm (30"0) cover width

Polydeck.

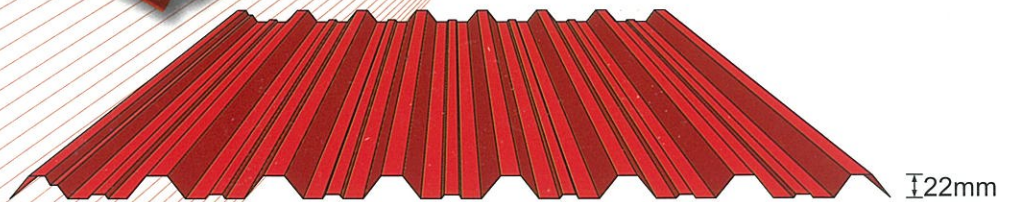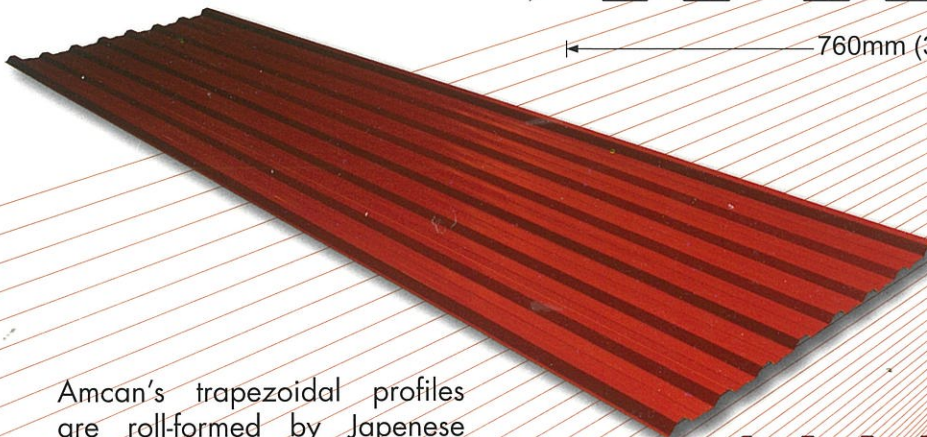

760mm (30"0) cover width

Amcan's trapezoidal profiles are roll-formed by Japanese Technology. Our **Amdex**. Bold Trapezoidal Ribbed profile and **Polydeck**. Trapezoidal Ribbed double through profile offer better rigidity and long spanning capabilities. This system is effective for roof and wall applications and is available to any required transportable length.

- Applicable for buildings which requires a rigidity profile with combine strength and lightness.

	Total Coated Thickness mm	Max Recommended Spacing of Supports							
		Roofs				Walls			
		Single Span mm	End Span mm	Internal Span mm	Overhang mm	Single Span mm	End Span mm	Internal Span mm	Overhang mm
Standard	0.48	1100	1300	1900	150	2400	3000	3000	150
Light	0.40	800	900	1250	125	1650	2100	2100	125
	0.31	600	600	900	100	1000	1100	1100	100
Heavy	0.66	1750	2000	2800	200	2700	3000	3000	200



Tolerances: Length ± 10 mm, Cover Width ± 4 mm, Thickness ± 0.02 mm

- All sizes and shapes of roofing accessories can be custom made to meet customers' different designs and specifications



Aesthetic & Design Flexibilities

PolyOrb.

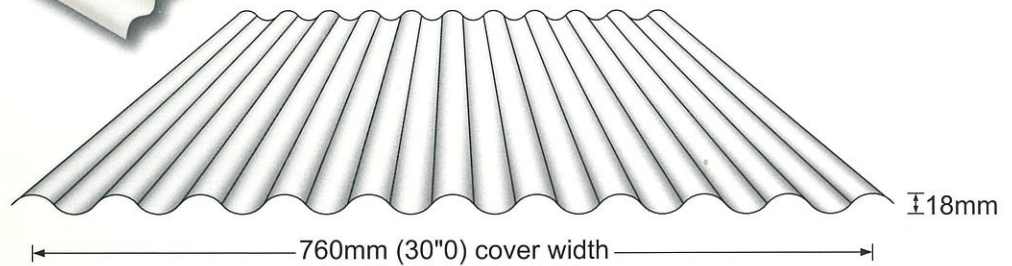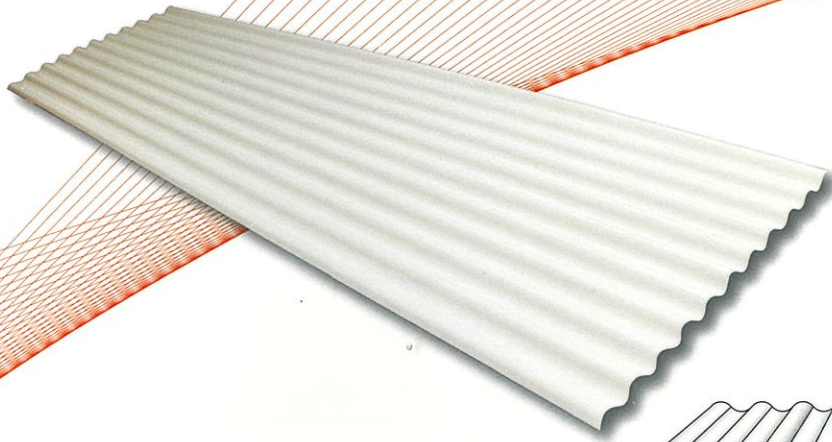

Amcan's corrugated profile is roll-formed using Australian roll-forming technology for both roof and wall cladding applications. It also features a unique ability to be fixed to a natural curve of eighteen (18) metres in radius of curvature and pre-curved without unsightly crimps to a radius of eight (8) metres.

- Applicable for buildings which requires a touch and versatile corrugated profile which is very common in Australia and New Zealand.


	Total Coated Thickness mm	Max Recommended Spacing of Supports							
		Roofs				Walls			
		Single Span mm	End Span mm	Internal Span mm	Overhang mm	Single Span mm	End Span mm	Internal Span mm	Overhang mm
Standard	0.48	700	900	1200	200	1800	2500	2700	200
Heavy	0.54	800	1300	1700	250	1800	2700	2700	250

Tolerances: Length ± 10 mm, Cover Width ± 4 mm, Thickness ± 0.02 mm


AmcanColors Series



HPE
AmcanColors[®]
- High performance Polyester

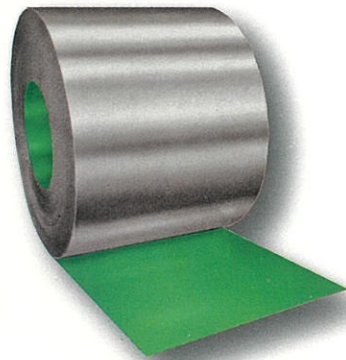

DuraTherm
AmcanColors[®]
- Super durable thermal control

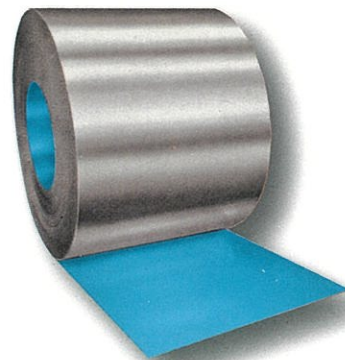


DuraFresh
AmcanColors[®]
- Super durable freshness



DuraFluor
AmcanColors[®]
- Super durable PVdF

Full Range with Complete Accessories



AmcanTile



Clip-deck



Yodo Zip-65



ValenTile




Amdex




S25 Yodo Standing Seam




Classiko




Polydeck




Yodo Roof 66




Rumako



PolyOrb

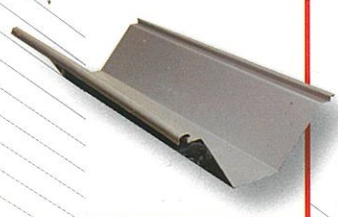


Yodo Roof 166 Seam Type



YodoTile



Flexiclad



Deck Plate



AMCAN GROUP

Sarawak Factory/Head Office Lot 779, Block 7, Jalan Demak Laut 3, MTLD Sejingkat Industrial Park, 93050 Kuching, Sarawak, Malaysia. Tel: +6082 432 323 Fax: +6082 432 828 Email: amcancolor@gmail.com

Sabah Factory/ Office

Lot 2, Jalan Limau Manis, Off Jalan Lintas, Off Mile 5, Jalan Tuaran, 88450 Kota Kinabalu, Sabah, Malaysia.

Tel: +6088 428484

Fax: +6088 424661

Johor Bahru Factory/ Office

Lot Plo 270, Jalan Firma 3, Tebrau Industrial Estate W-81100 Johor Bahru, Johor, Malaysia.

Tel: +607 3552416

Fax: +607 3552426

Kuala Lumpur Office

4-2-4, Jalan Bayam, Queen's Avenue, 55100 Kuala Lumpur, Malaysia.

Tel: +603 92055330

Fax: +603 92055320

Singapore Office

152-H, East Coast Road, Singapore.

Tel: +65 63482486

Fax: +65 63482487



Premium 55% Al-Zn Alloy Coated Steel in Amcan Color Coating Process